



Performance Curve

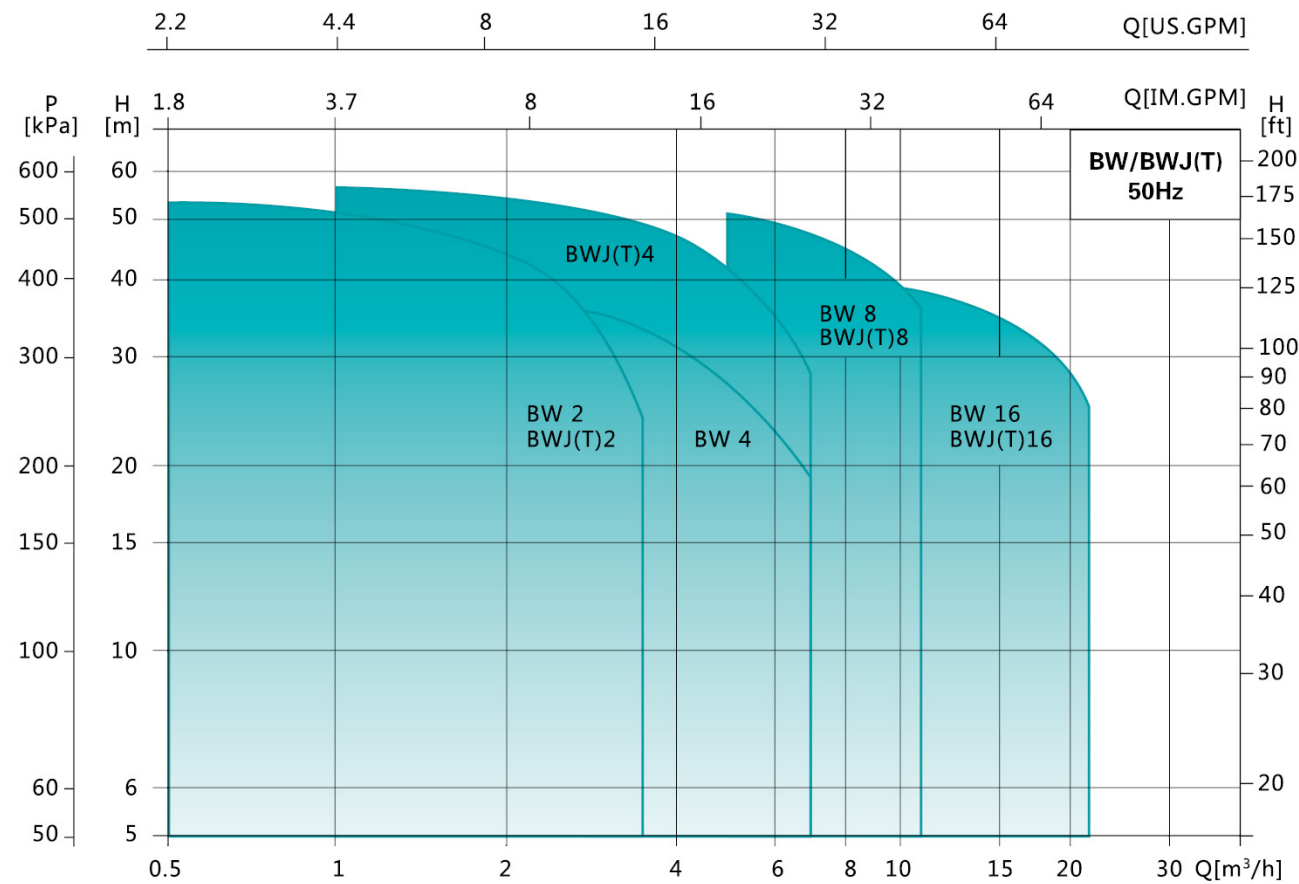

Model	BW2/BWJ(T)2	BW4/BWJ(T)4	BW8	BW16	BWJ(T)8	BWJ(T)16
Rated Flow(m³/h)	2	4	8	16	8	16
Flow Range(m³/h)	0.5~3	1~6	5~10	8~20	5~10	8~20
Max.Pressure(bar)	5.5	4	5	4	5	4
Motor Power(kW)	0.37~0.75	0.55~1.1	0.75~2.2	2.2~3	0.75~2.2	2.2~3
Max.Efficiency(%)	45	59	64	70	64	70
Inlet	G1	G1 1/4	G2	G2	G1 1/2	G1 1/2
Outlet	G1	G1	G2	G2	G1 1/4	G1 1/4

Performance Details-BW2

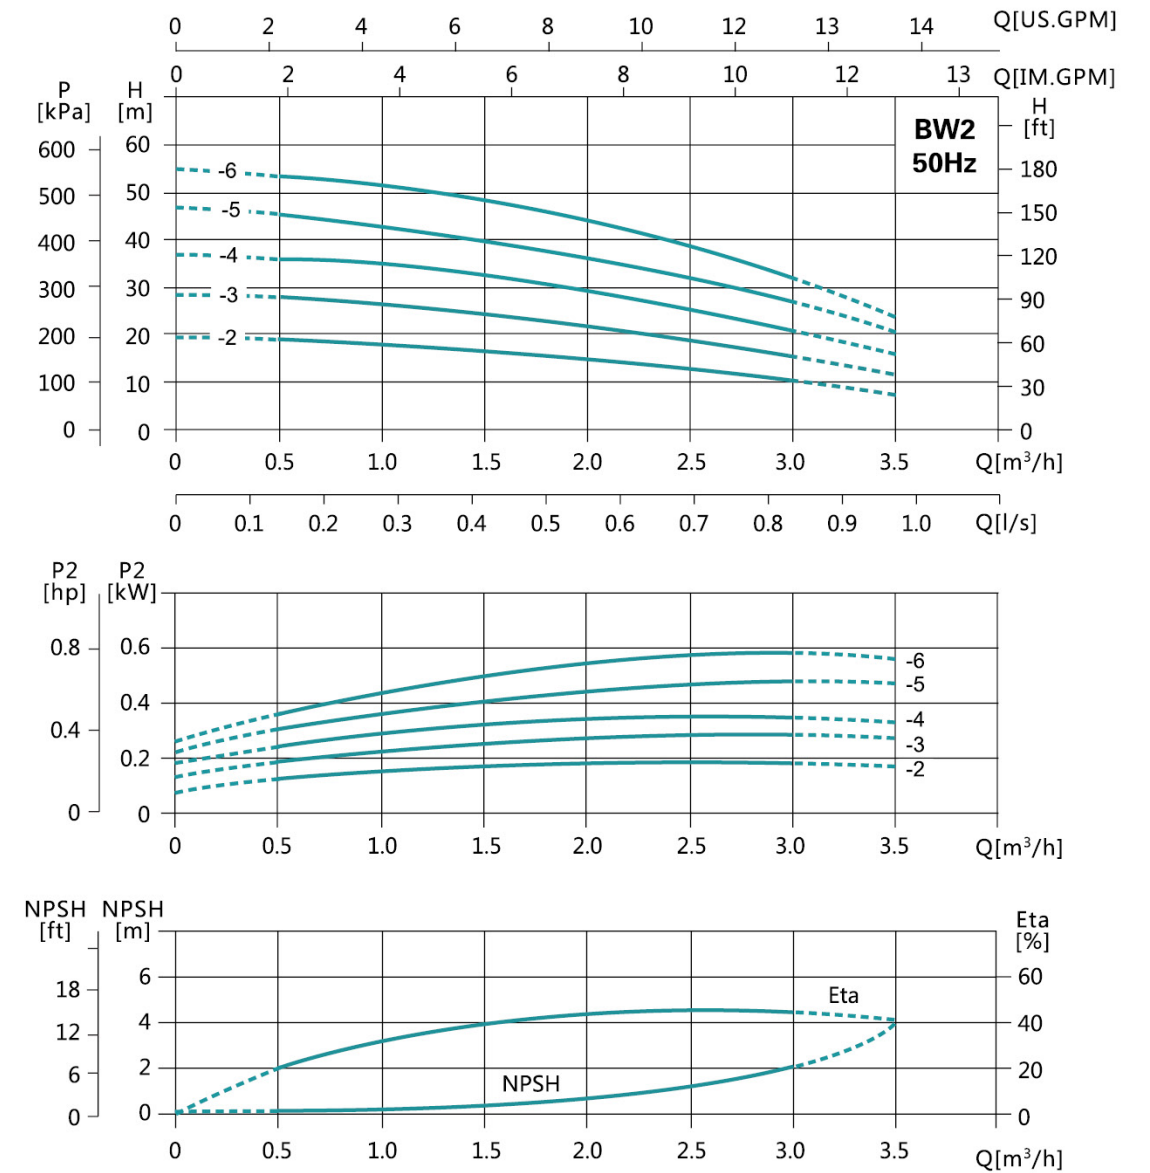

It is recommended to be used within lift range.

Model	Power		Q(m³/h)	0.5	1.0	1.5	2.0	2.5	3.0	Head Range (m)
	kW	HP								
BW2-2	0.37	0.5	H (m)	19	18	16.5	15	13	10	10~19
BW2-3	0.37	0.5		28	26.5	24.5	22	19	15.5	15.5~28
BW2-4	0.55	0.75		36	34.5	33	30	25	20.5	20.5~36
BW2-5	0.55	0.75		45.5	43	40	36	31.5	26.5	26.5~45.5
BW2-6	0.75	1		53.5	51	48	45	39	32	32~53.5