



Performance Details-BW8

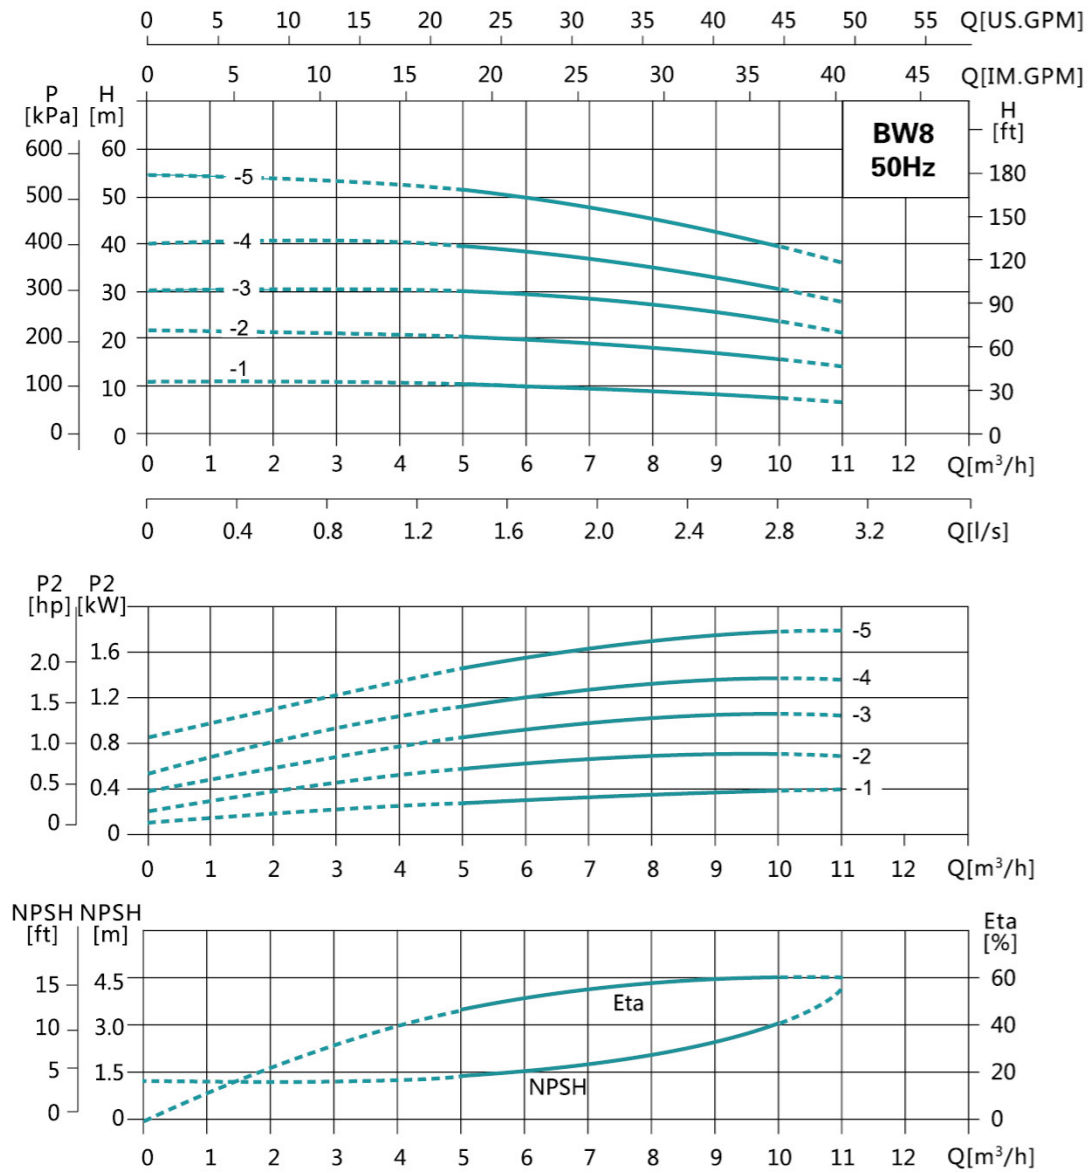

It is recommended to be used within lift range.

Model	Power		Q(m³/h)	5	6	7	8	9	10	Head Range (m)
	kW	HP								
BW8-2	0.75	1	H (m)	20	19.5	19	18	17	15.5	15.5~20
BW8-3	1.1	1.5		29.5	29	28	27	25	23	23~29.5
BW8-4	1.5	2		39	38	37	35	33	30.5	30.5~39
BW8-5	2.2	3		51	49.5	47.5	45	42.5	39.5	39.5~51

Performance Details-BW16

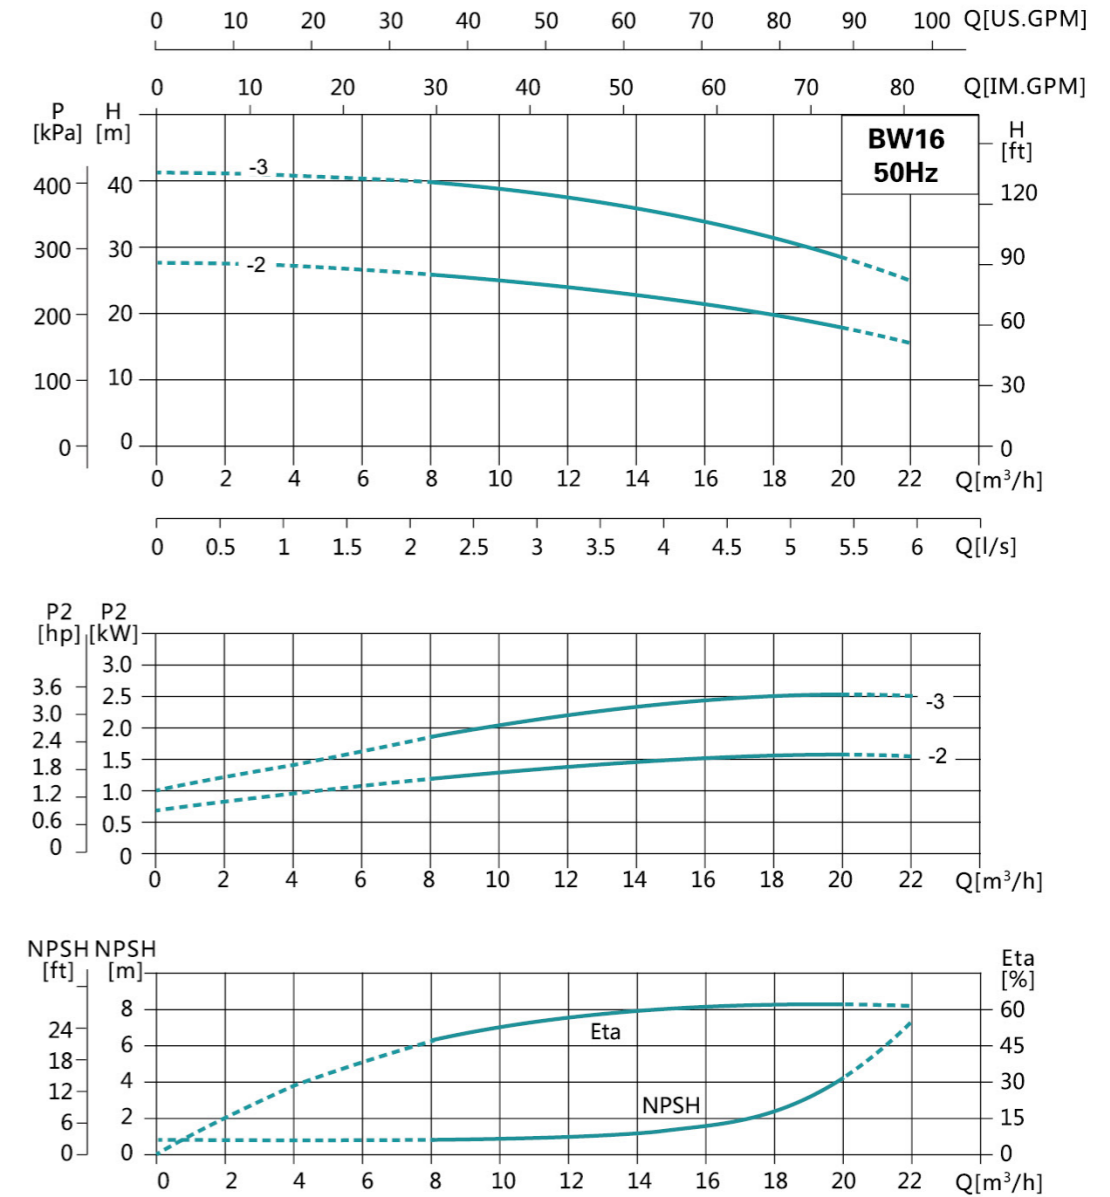

It is recommended to be used within lift range.

Model	Power		Q(m³/h)	8	10	12	14	16	18	20	Head Range (m)
	kW	HP									
BW16-2	2.2	3	H (m)	26	25	24	23	21.7	20	18	18~26
BW16-3	3	4		40	39	38	36	34	31.5	29	29~40