


## 型号说明/MODEL INSTRUCTION

Example

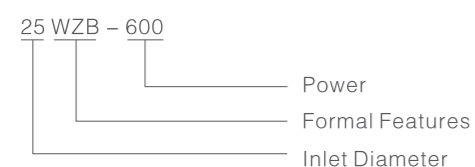

25WZB-600 means the pump's outlet is 25mm and power is 600W  
 25WZB-600表示为：进水口径为25mm，功率为600W

## 应用范围/Application Range


- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. 家庭用水增压。</li> <li>2. 一般需增压供水的场所。</li> <li>3. 输送液体温度不超过40°C。</li> <li>4. 输送液体的pH值为6.5~8.5。</li> <li>5. 液体中固体杂质的体积比不超过0.1%，粒度不大于0.2mm。</li> </ol> | <ol style="list-style-type: none"> <li>1. General pressure boosting in household.</li> <li>2. The place of pressurized water supply.</li> <li>3. Transfer liquid temperature no more than 40°C.</li> <li>4. The PH of Transfer liquid is 6.5~8.5.</li> <li>5. The volume of solid impurities in the liquid no more than 0.1%, particle size less than 0.2mm.</li> </ol> |
|--|---|

## 技术参数

序号	型号	额定电压 (V)	频率 (Hz)	额定功率 (W)	电流 (A)	最大流量 (m <sup>3</sup> /h)	最大扬程 (m)	净重 (kg)
1	25WZB-200	220	50	200	2	2	25	9
2	25WZB-300	220	50	300	2.5	2	30	9.2
3	25WZB-400	220	50	400	2.7	2	35	9.7
4	25WZB-600	220	50	600	4.2	3	40	12.7
5	25WZB-800	220	50	800	5.2	3.5	45	13.7
6	40WZB-1100	220	50	1100	8	6	50	18.7
7	40WZB-1500	220	50	1500	10	6.5	60	19.2

## TECHNICAL DATA

NO	Model	Rate Voltage (V)	Frequency (Hz)	Rate Power (W)	Current (A)	Max Flow (m <sup>3</sup> /h)	Max Head (m)	Net Weight (kg)
1	25WZB-200	220	50	200	2	2	25	9
2	25WZB-300	220	50	300	2.5	2	30	9.2
3	25WZB-400	220	50	400	2.7	2	35	9.7
4	25WZB-600	220	50	600	4.2	3	40	12.7
5	25WZB-800	220	50	800	5.2	3.5	45	13.7
6	40WZB-1100	220	50	1100	8	6	50	18.7
7	40WZB-1500	220	50	1500	10	6.5	60	19.2

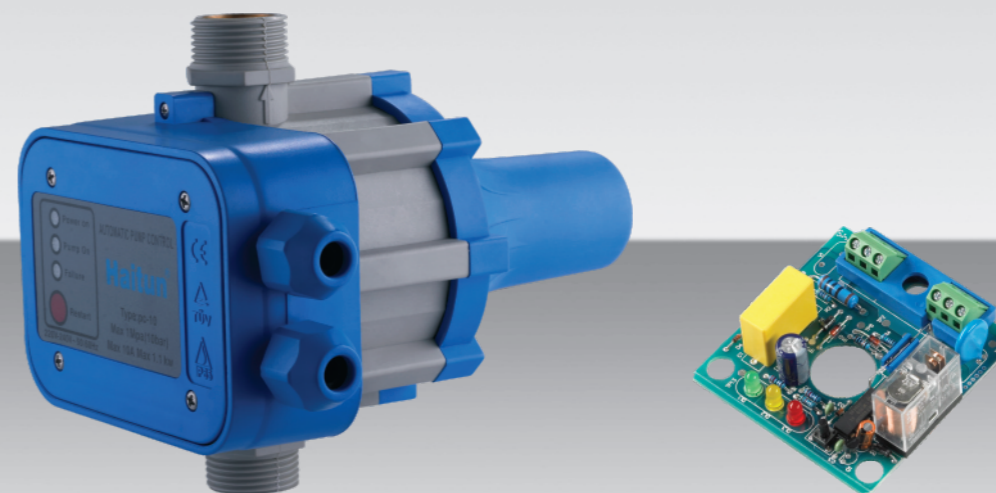Pressure Control **PC-10**

## 技术参数/TECHNICAL DATA

1. 启动压力/Starting Pressure: 1.5bar or 2.2bar
2. 最大额定电流/Max Rated Current: 10A
3. 允许最大压力/Max Allowable Pressure: 10bar
4. 额定电压/Rated Voltage: 110V or 220V
5. 频率/Frequency: 50/60HZ
6. 最高环境温度/Max Ambient Temperature: 40°C
7. 最高介质温度/Max Liquid Temperature: 60°C
8. 保护等级/Protection Degree: IP65

## 描述/DESCRIPTIONS

1. 自动控制水泵运行和停止  
Stop and start the pump automatically
2. 缺水时自动停止水泵工作  
Stop the pump in the case of water shortage
3. 断电后，来电自动启动  
After power cut off, it can restart the pump automatically when the power on
4. 强制启动  
Forced start
5. 螺纹接口：G1"外螺纹  
Joint screw: G1"male

## 可供选择项/OPTIONS

1. 可供选择的型号及功能  
Optional models and function  
A: PC-10A: 安装时，启动压力可调节，调节范围：1.5BAR-3.0BAR  
PC-10A: Starting pressure is adjustable during installation, adjustment range: 1.5bar-3.0bar.  
B: PC-10M: 缺水自启，自启的时间间隔是8秒，30秒，1分钟，10分钟，30分钟，1小时，2小时无限循环  
PC-10M: Automatic restart after water shortage, the restart Interval time is 8S, 30S, 1minute, 10minutes, 30 minutes, 1 hour, 2 hours recycle  
以上A,B两项可结合使用，也可单独使用  
The above 2 options function can be achieved at the same time, or you can choose just one
2. 颜色  
Color.
3. 快速接头G1"  
G1" plastic pipe joint for a quick connection to water pump.
4. 电源线长：  
Power cable length

## 包装信息/PACKING INFORMATION

BOX SIZE(CM)	23x17x18
CARTON SIZE(CM)	52x47x38
PCS/CTN	12
N.W.(KGS)	13.00
G.W.(KGS)	16.20
20GP QUANTITIES(PCS)	3804

## 认证及标准

